

FIG. 1 is a perspective view of a device 20. The device 20 includes a main body 22 with a top surface 28 and a bottom surface 32. A cable 84 is connected to the bottom surface 32 via a connector 86. The cable 84 is further connected to a control unit 460. A dashed line D indicates a cross-section line.

FIG- 3

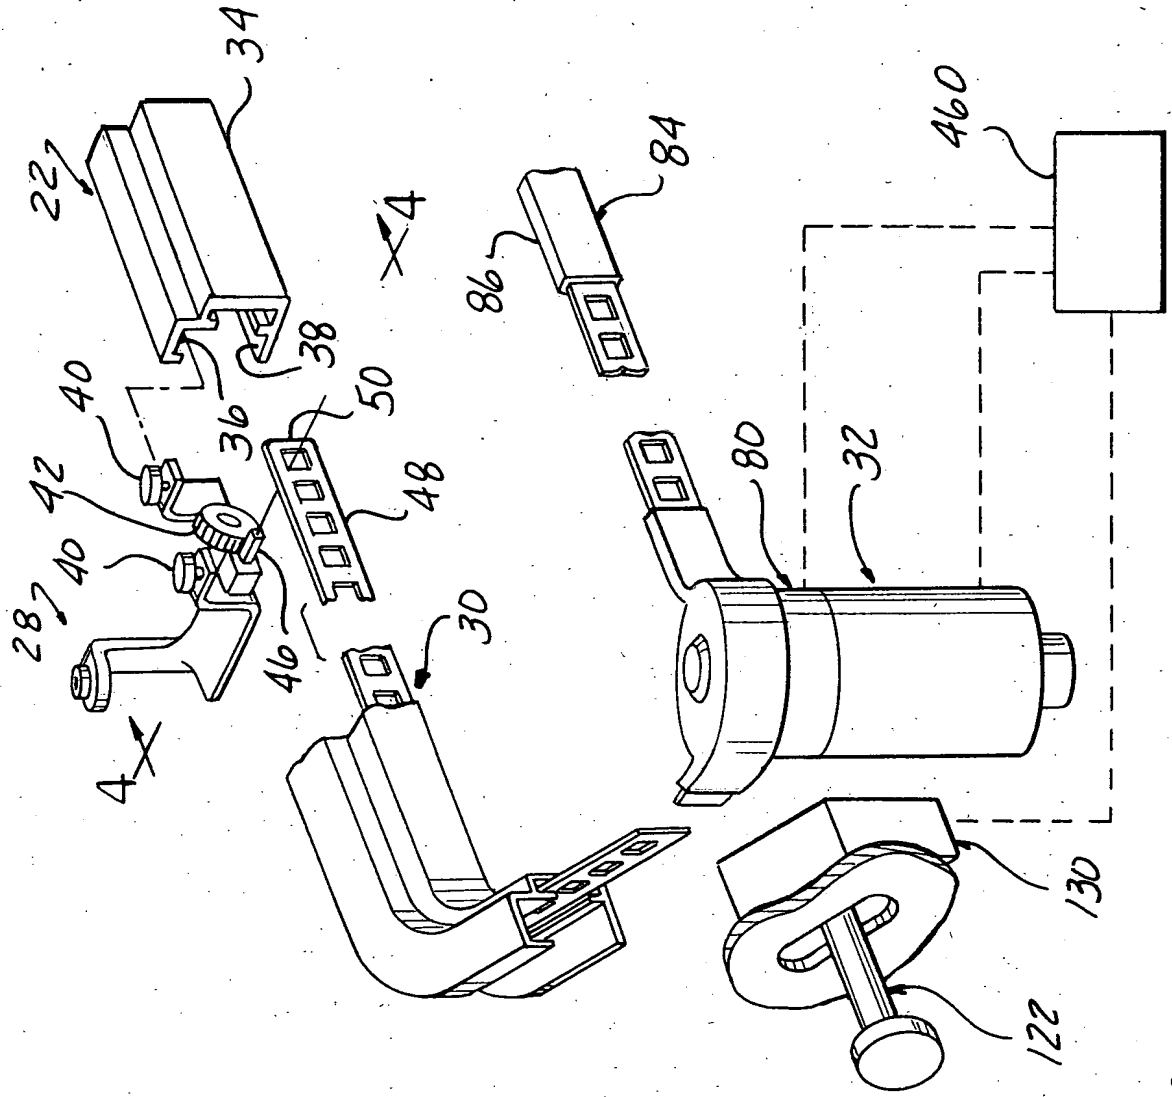


FIG-2

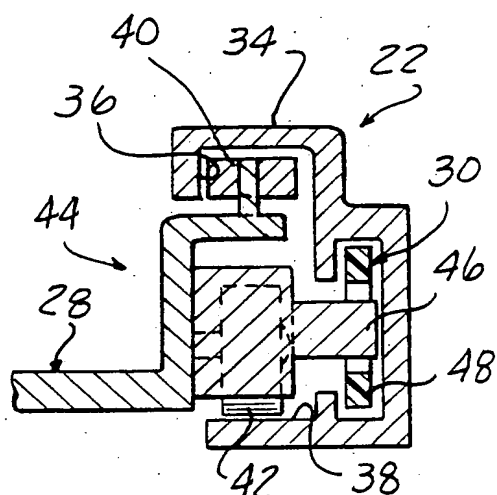


FIG - 4

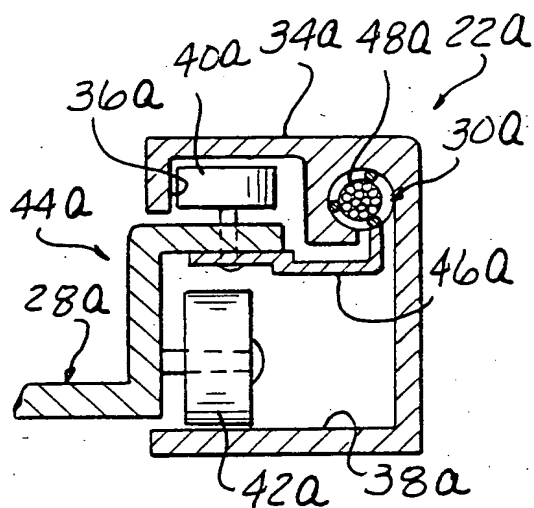


FIG-5

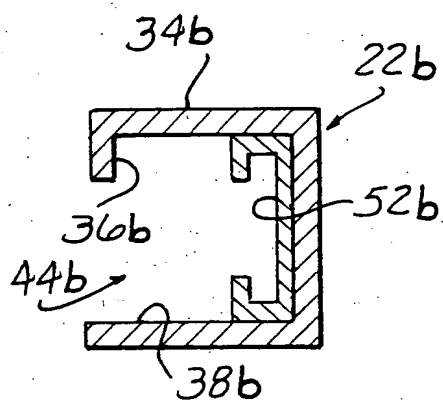


FIG-6

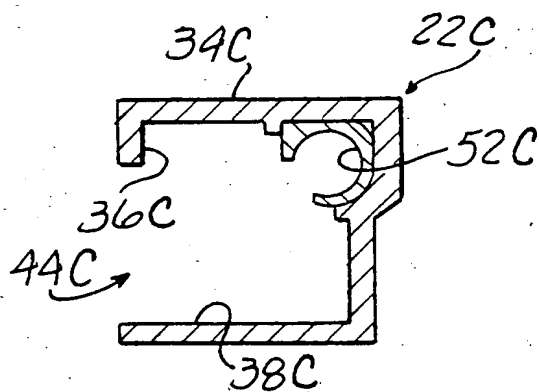


FIG - 7

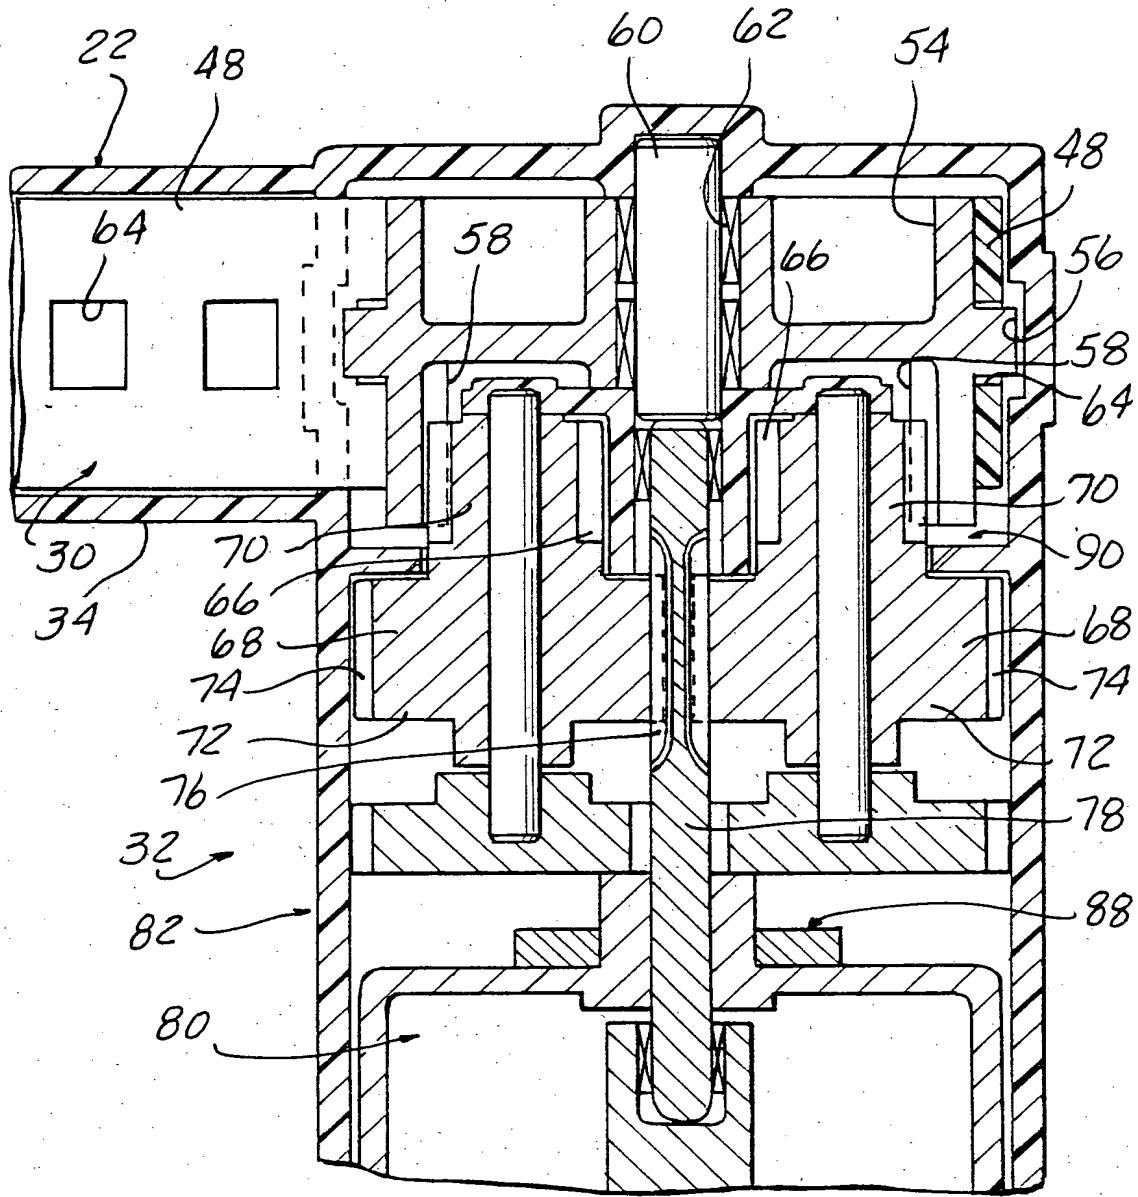


FIG - 8

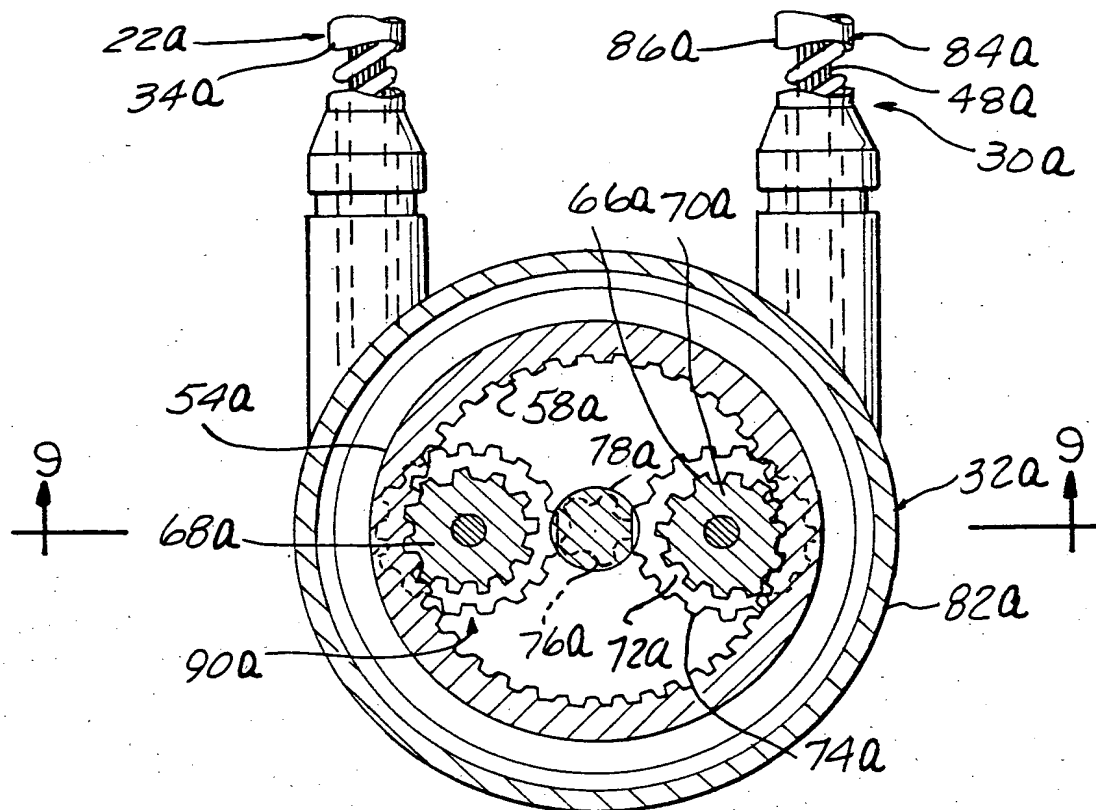


FIG - 10

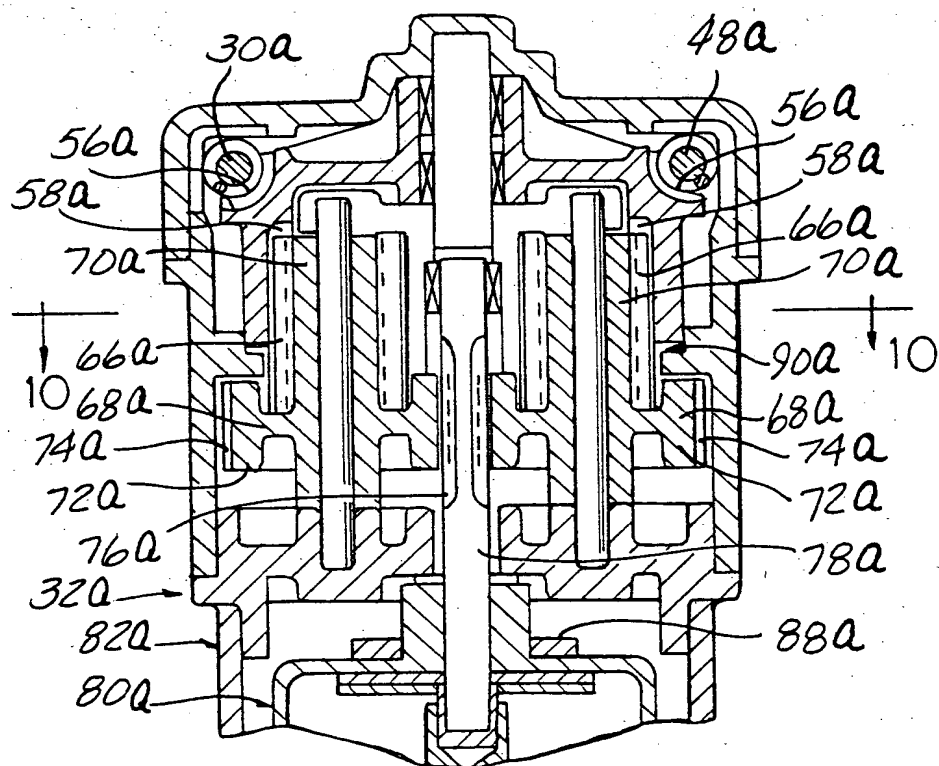


FIG - 9

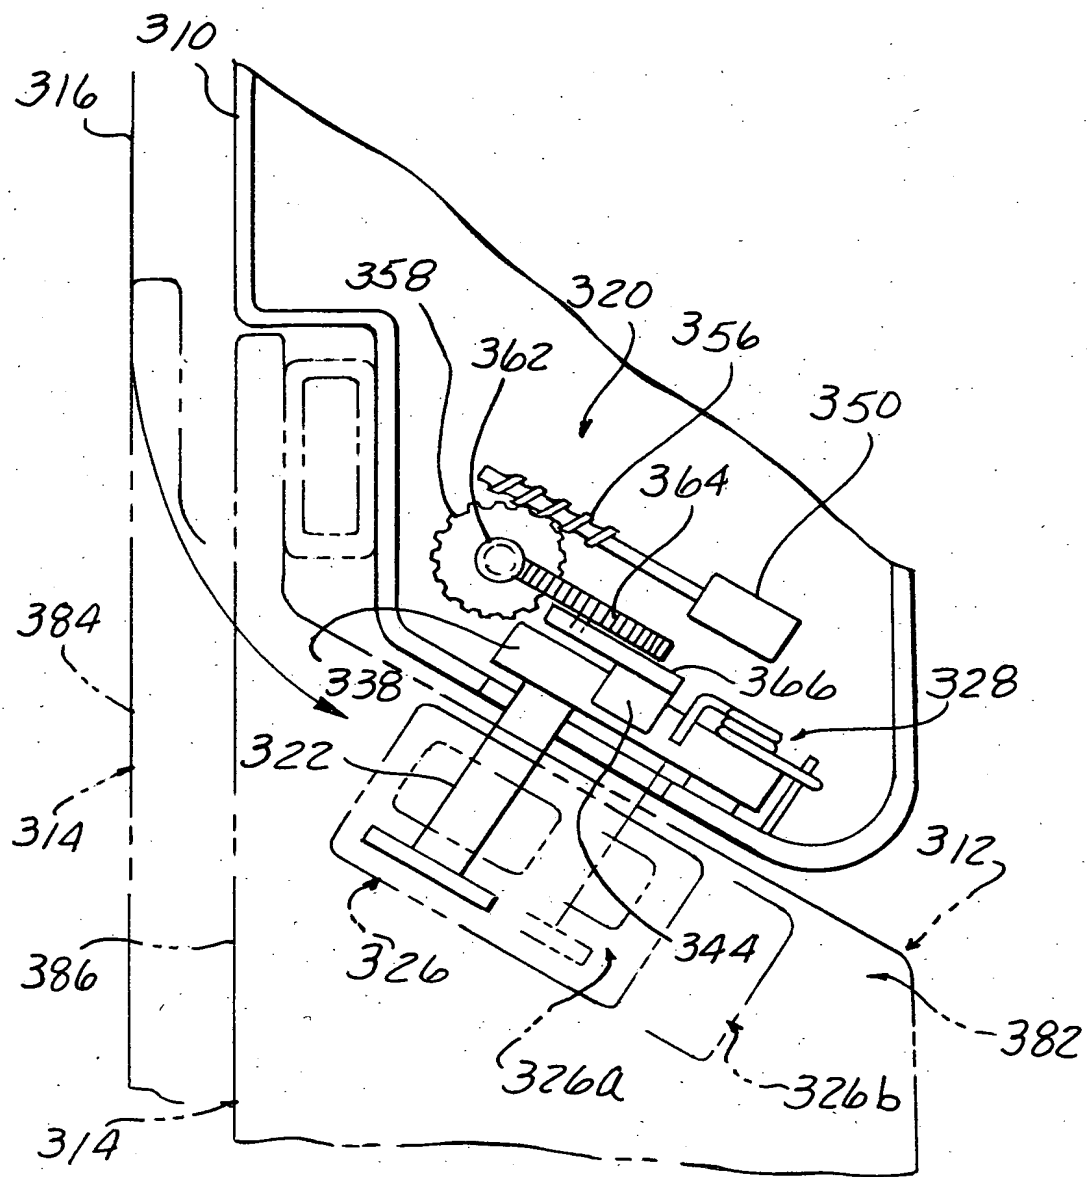


FIG - 11

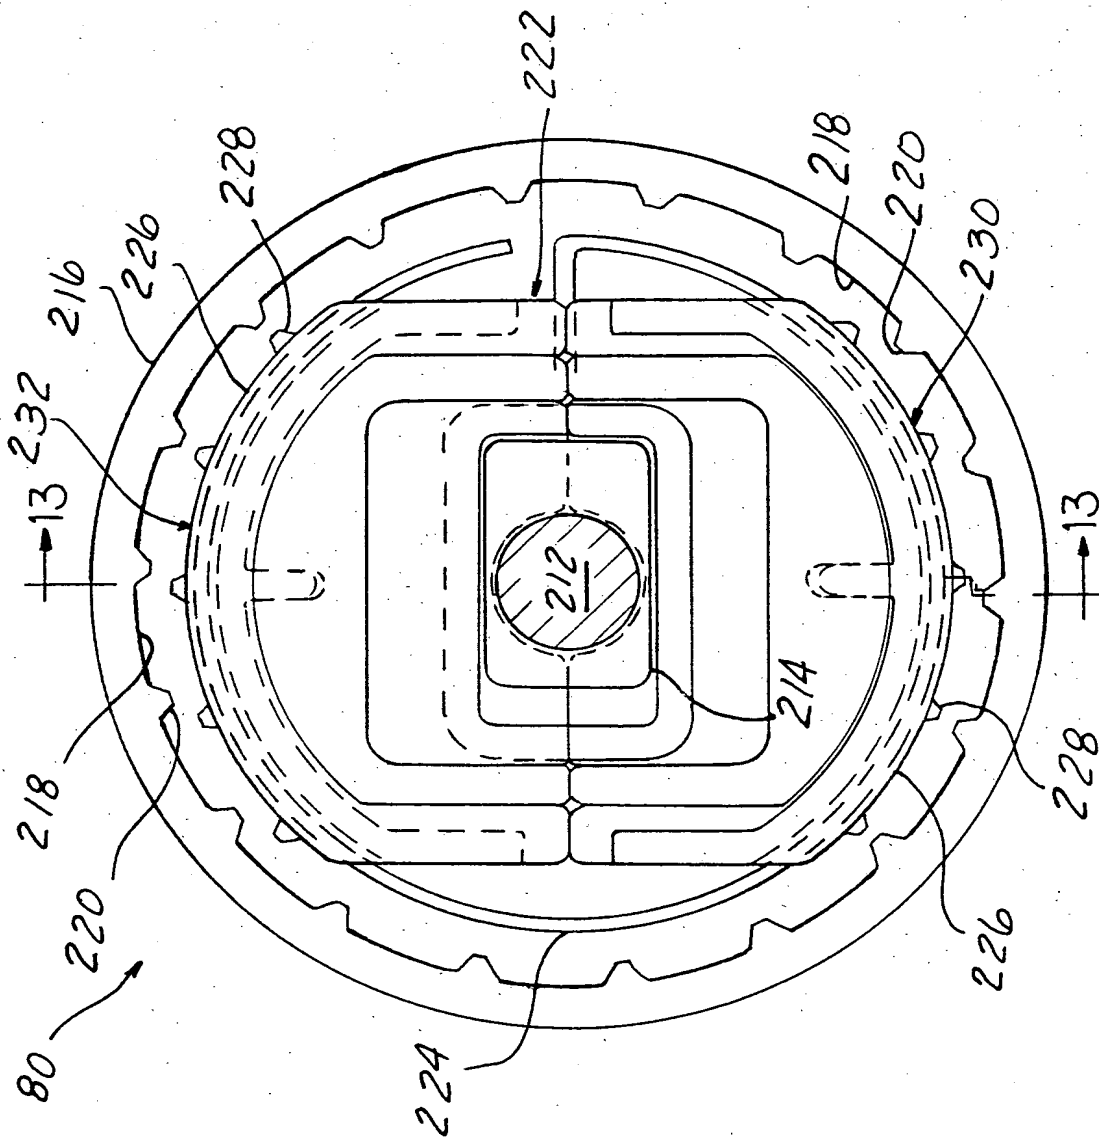


FIG-12

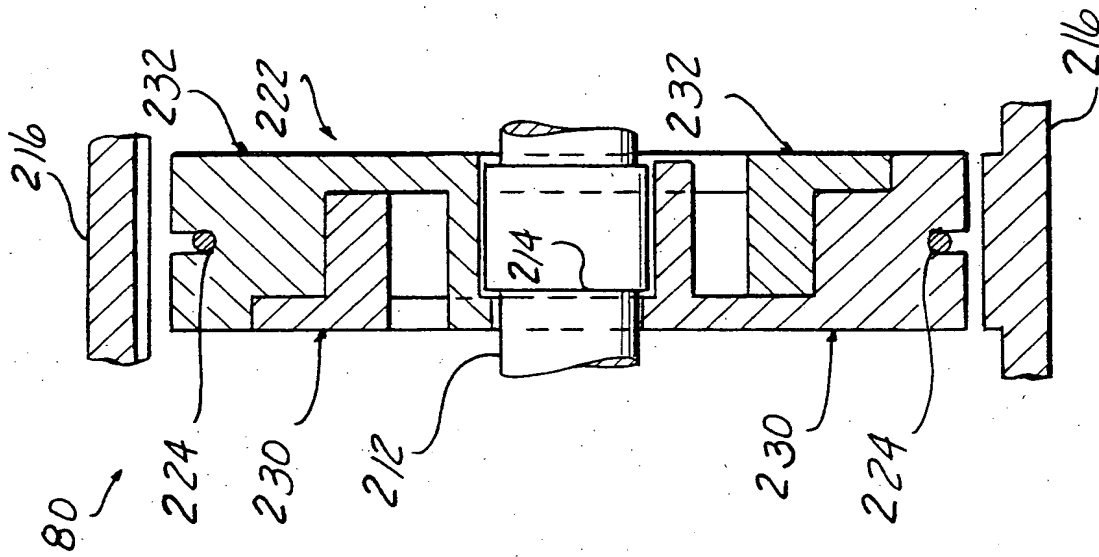


FIG-13

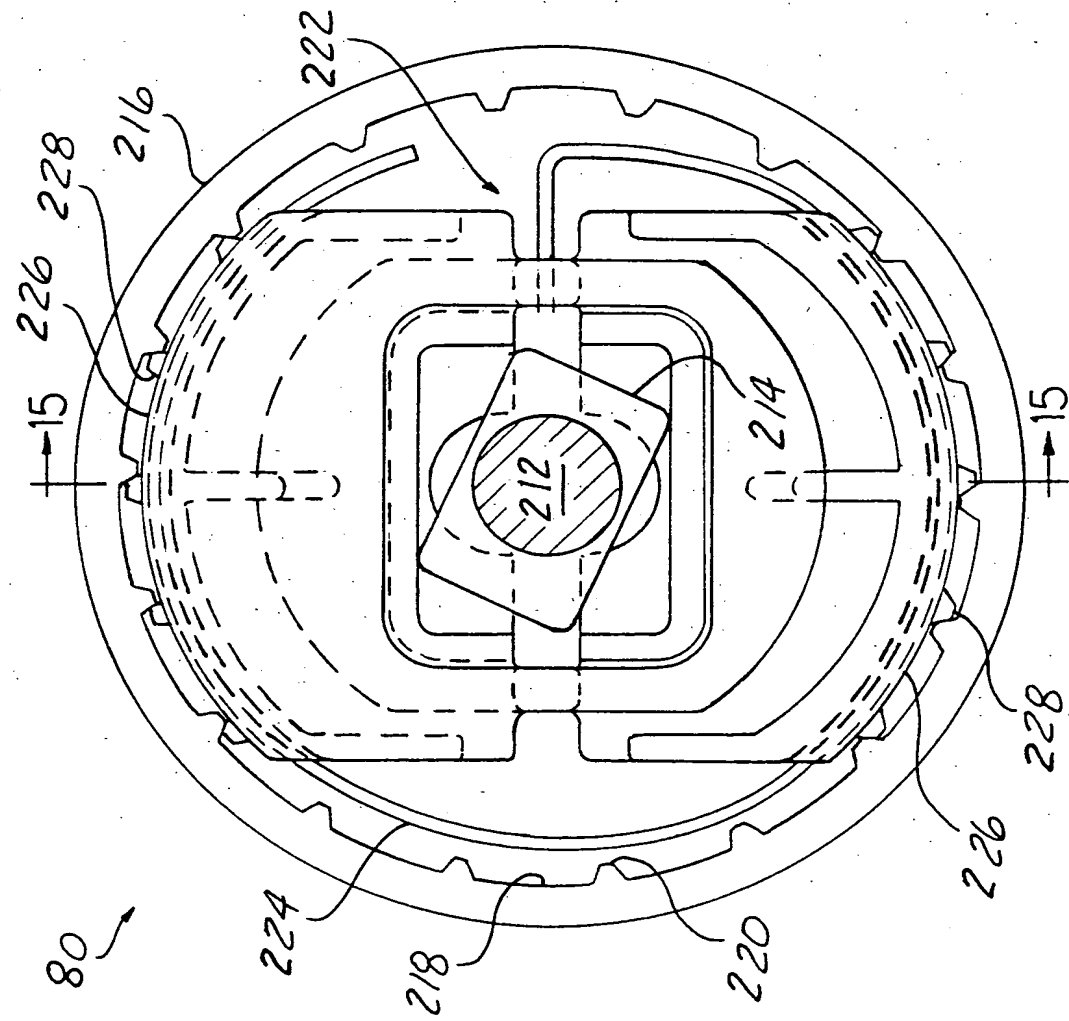


FIG-14

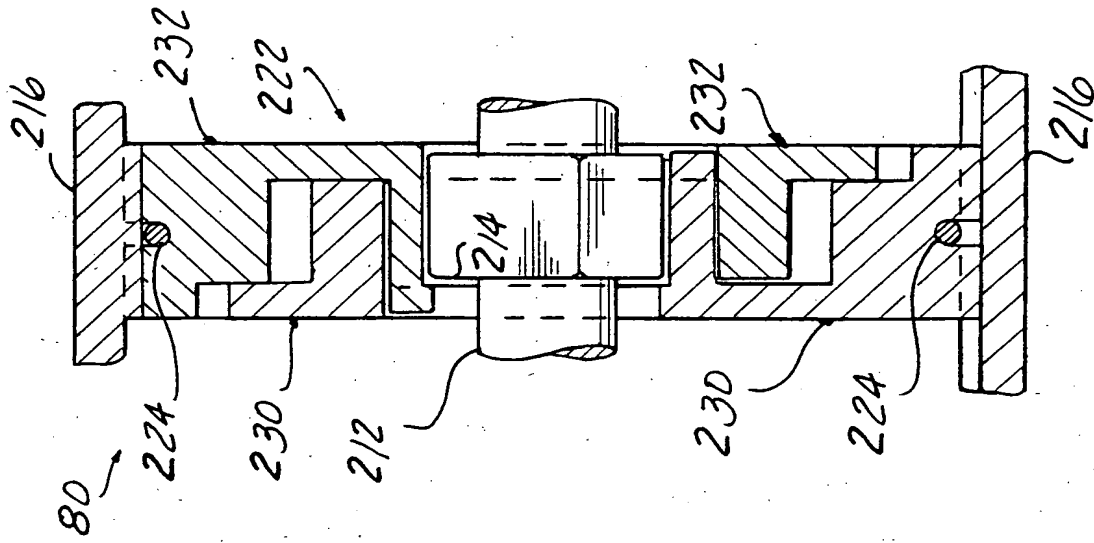


FIG-15



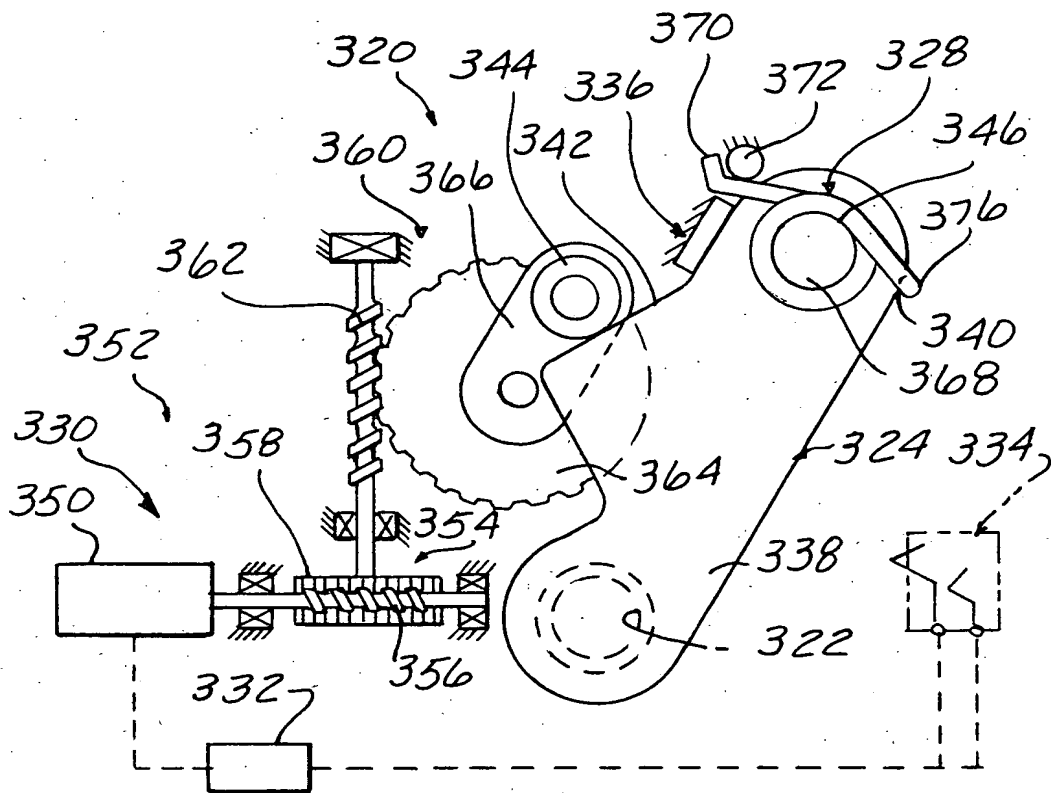


FIG - 16

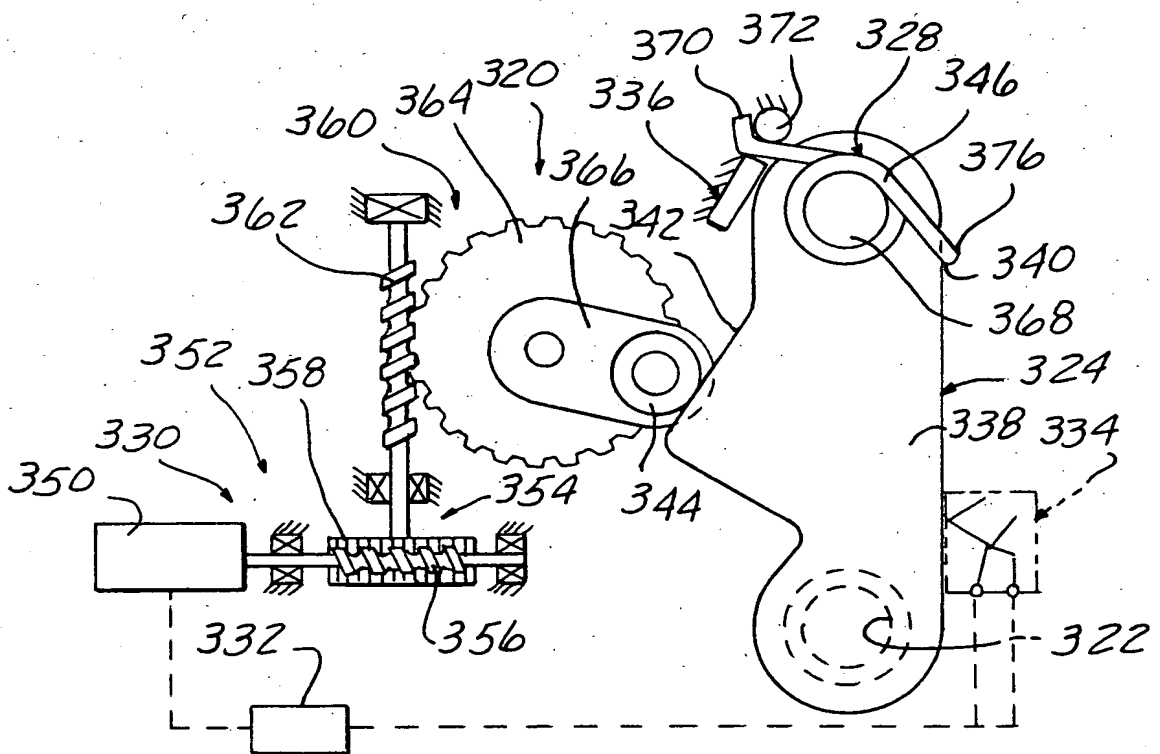


FIG - 17

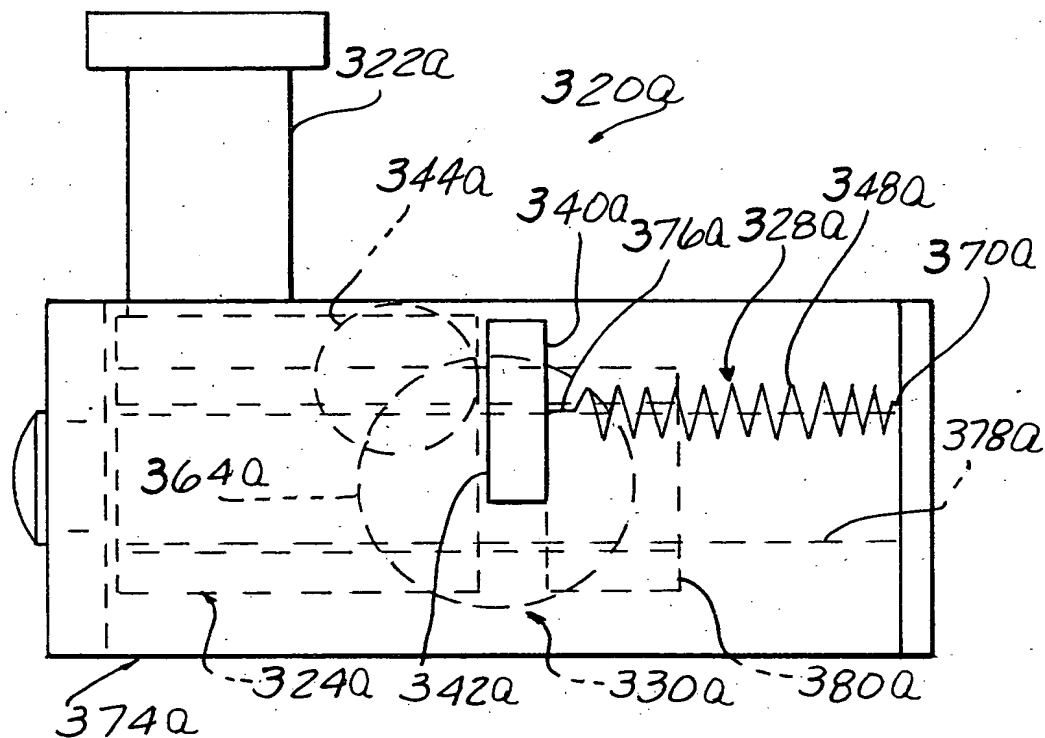


FIG-18

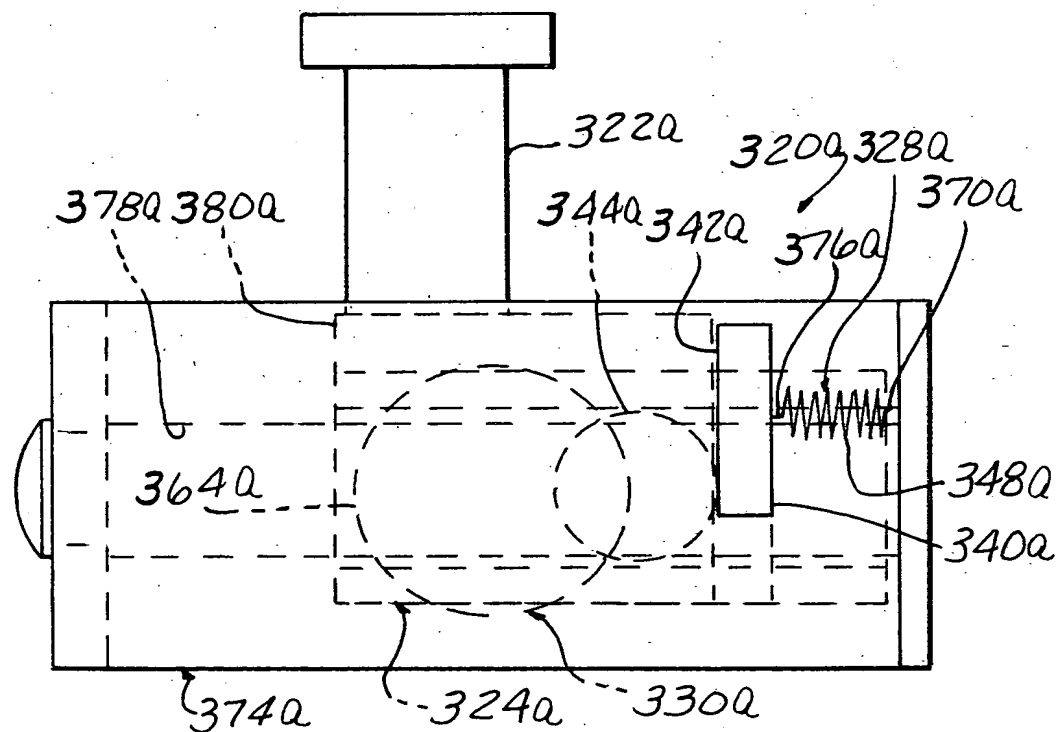


FIG-19

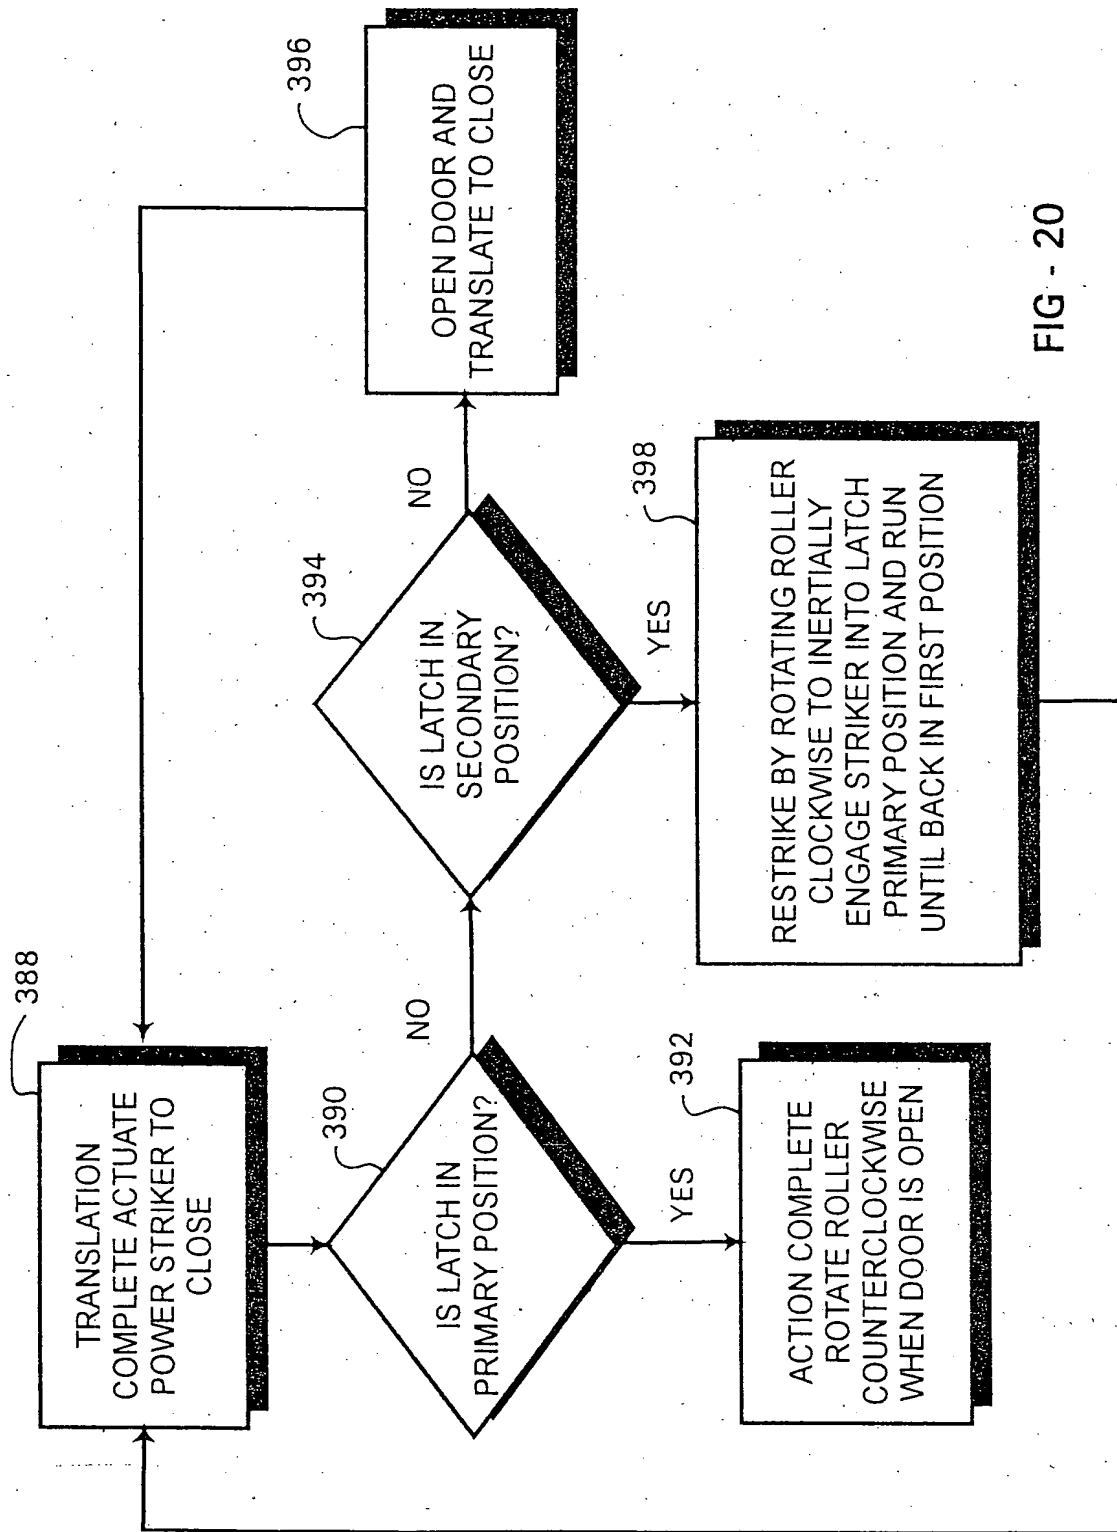


FIG - 20

FIG - 21A

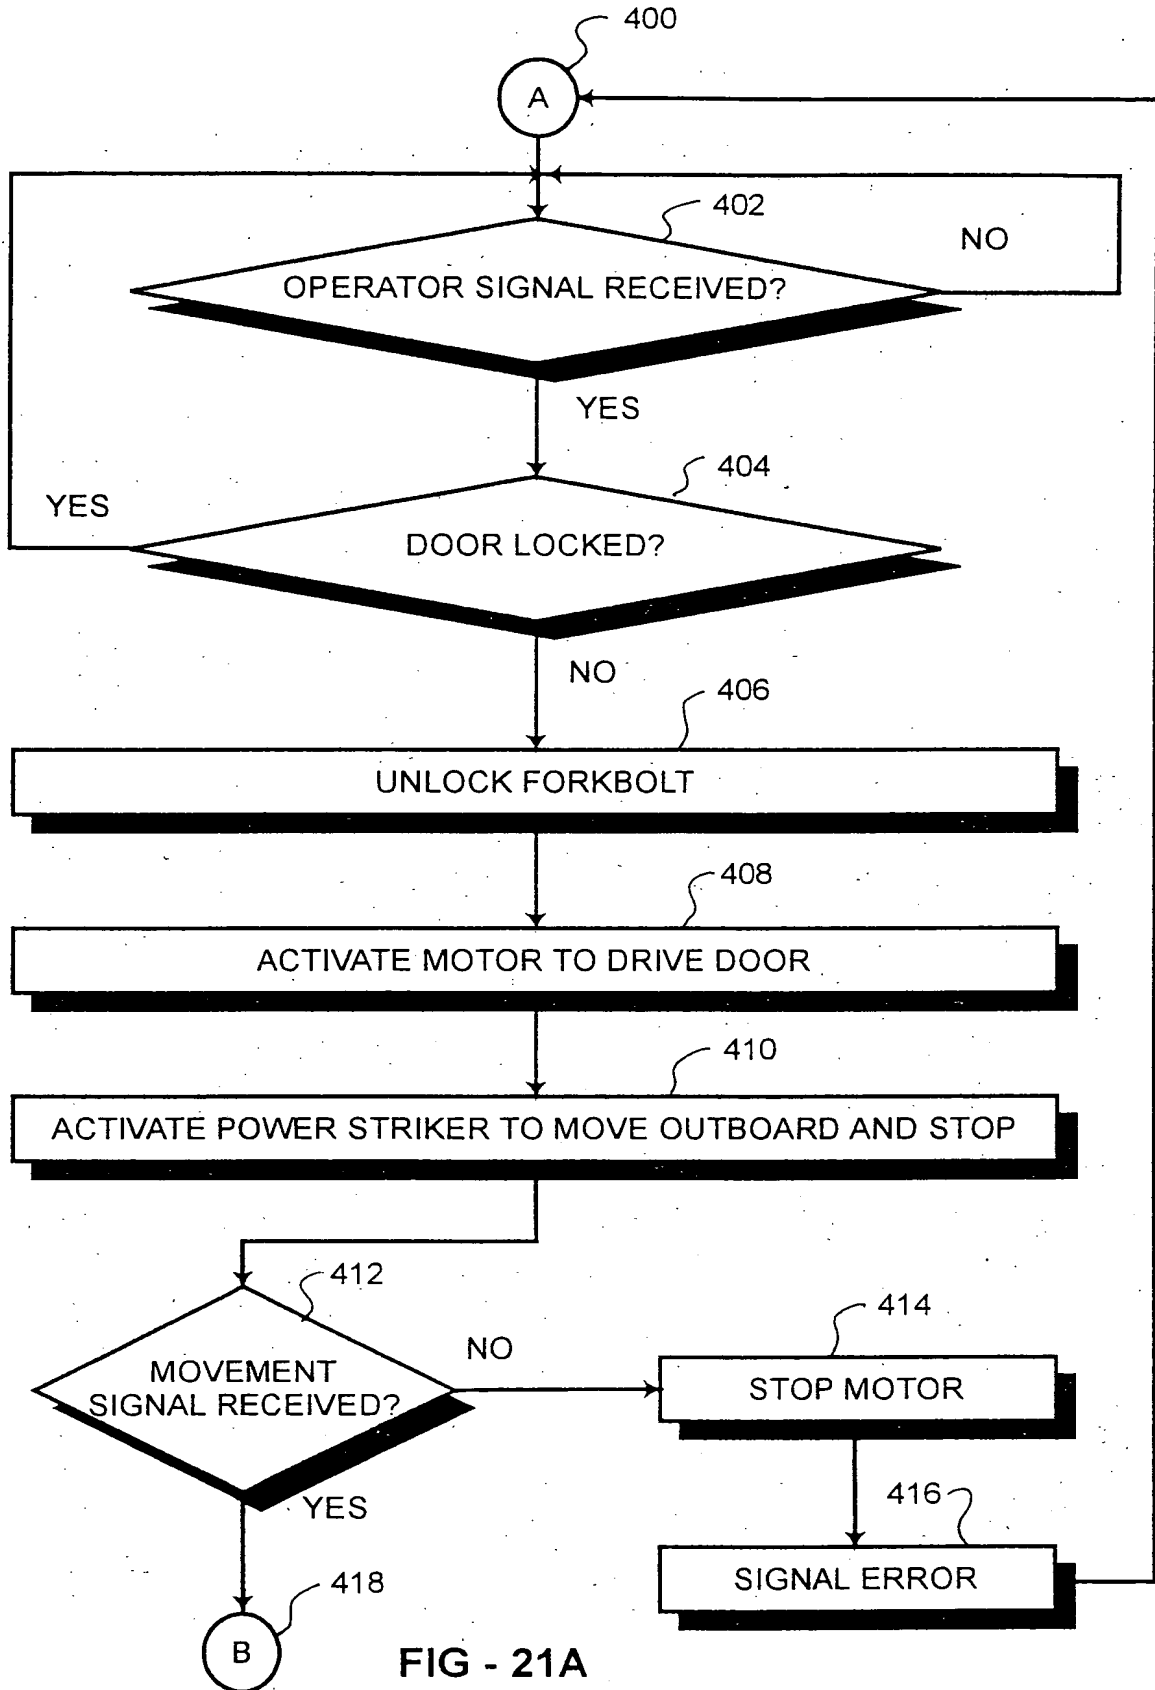


FIG - 21A

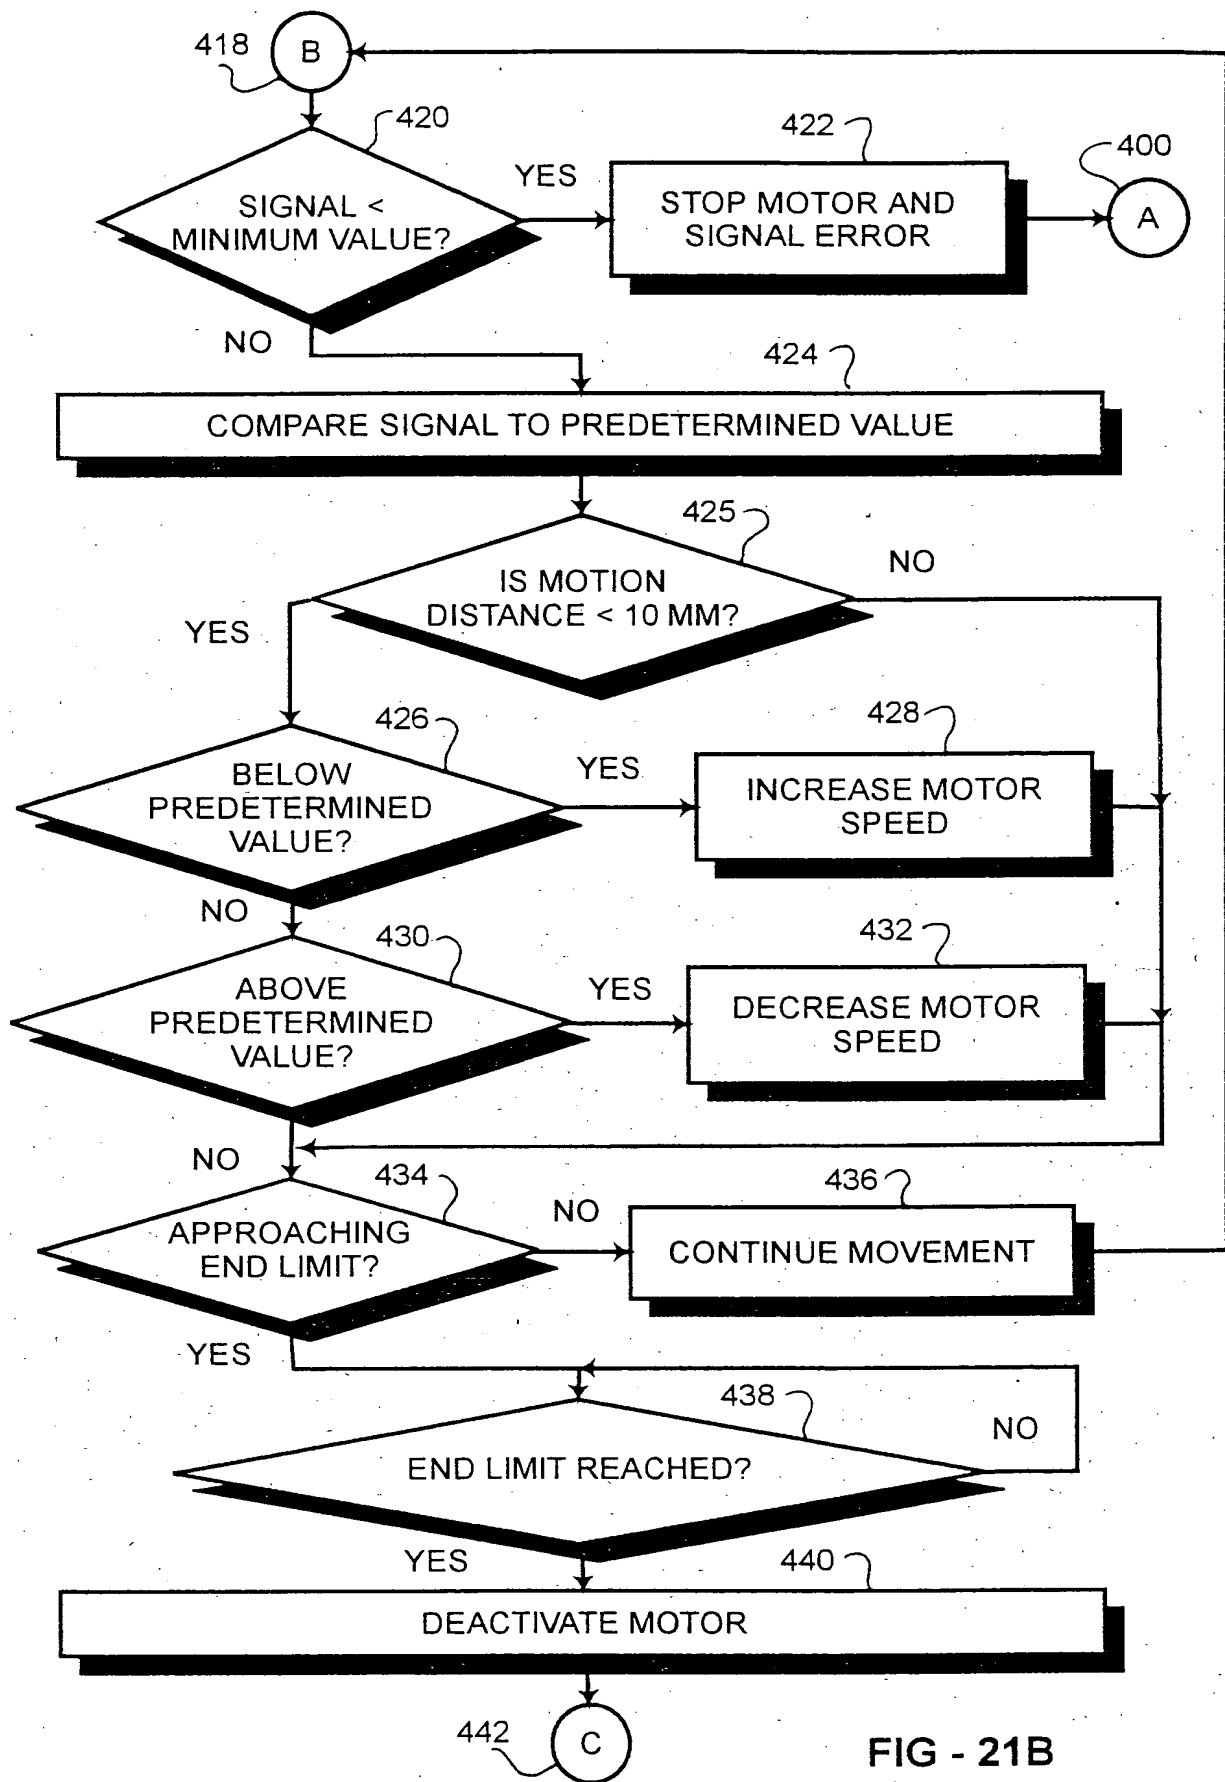
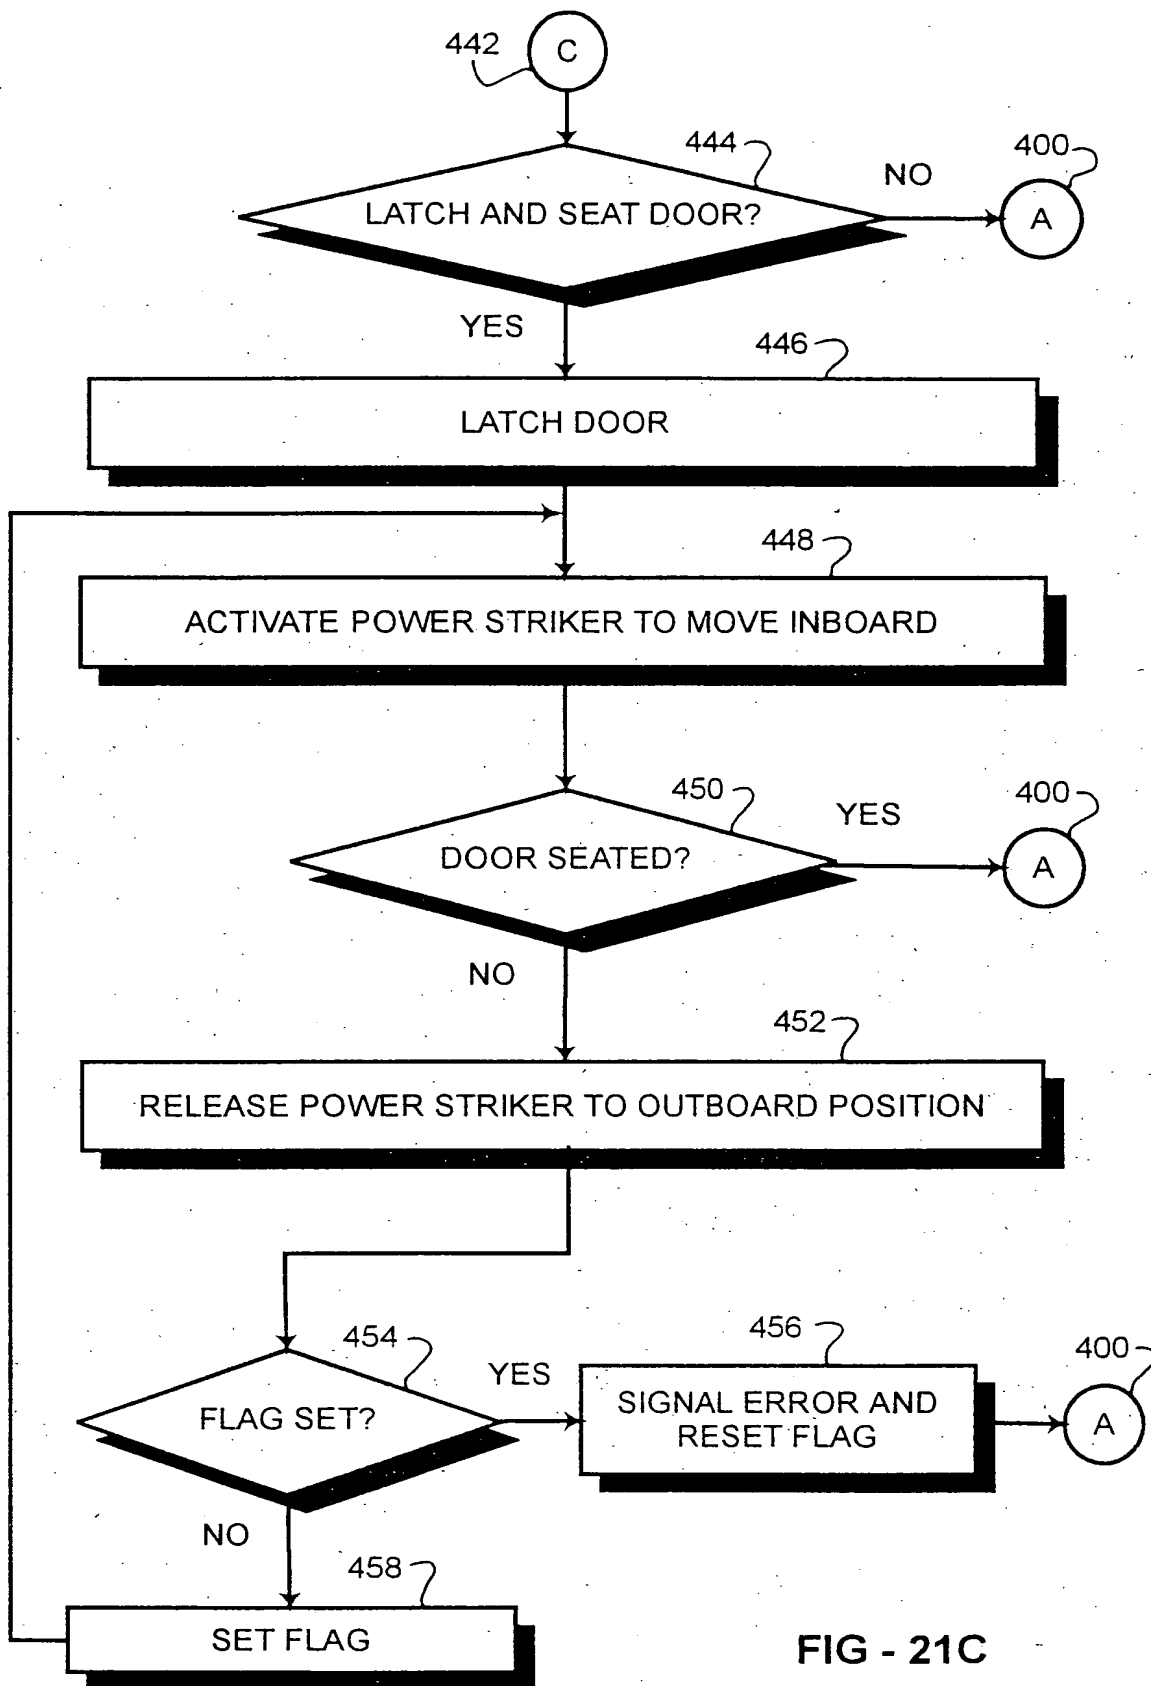


FIG - 21B



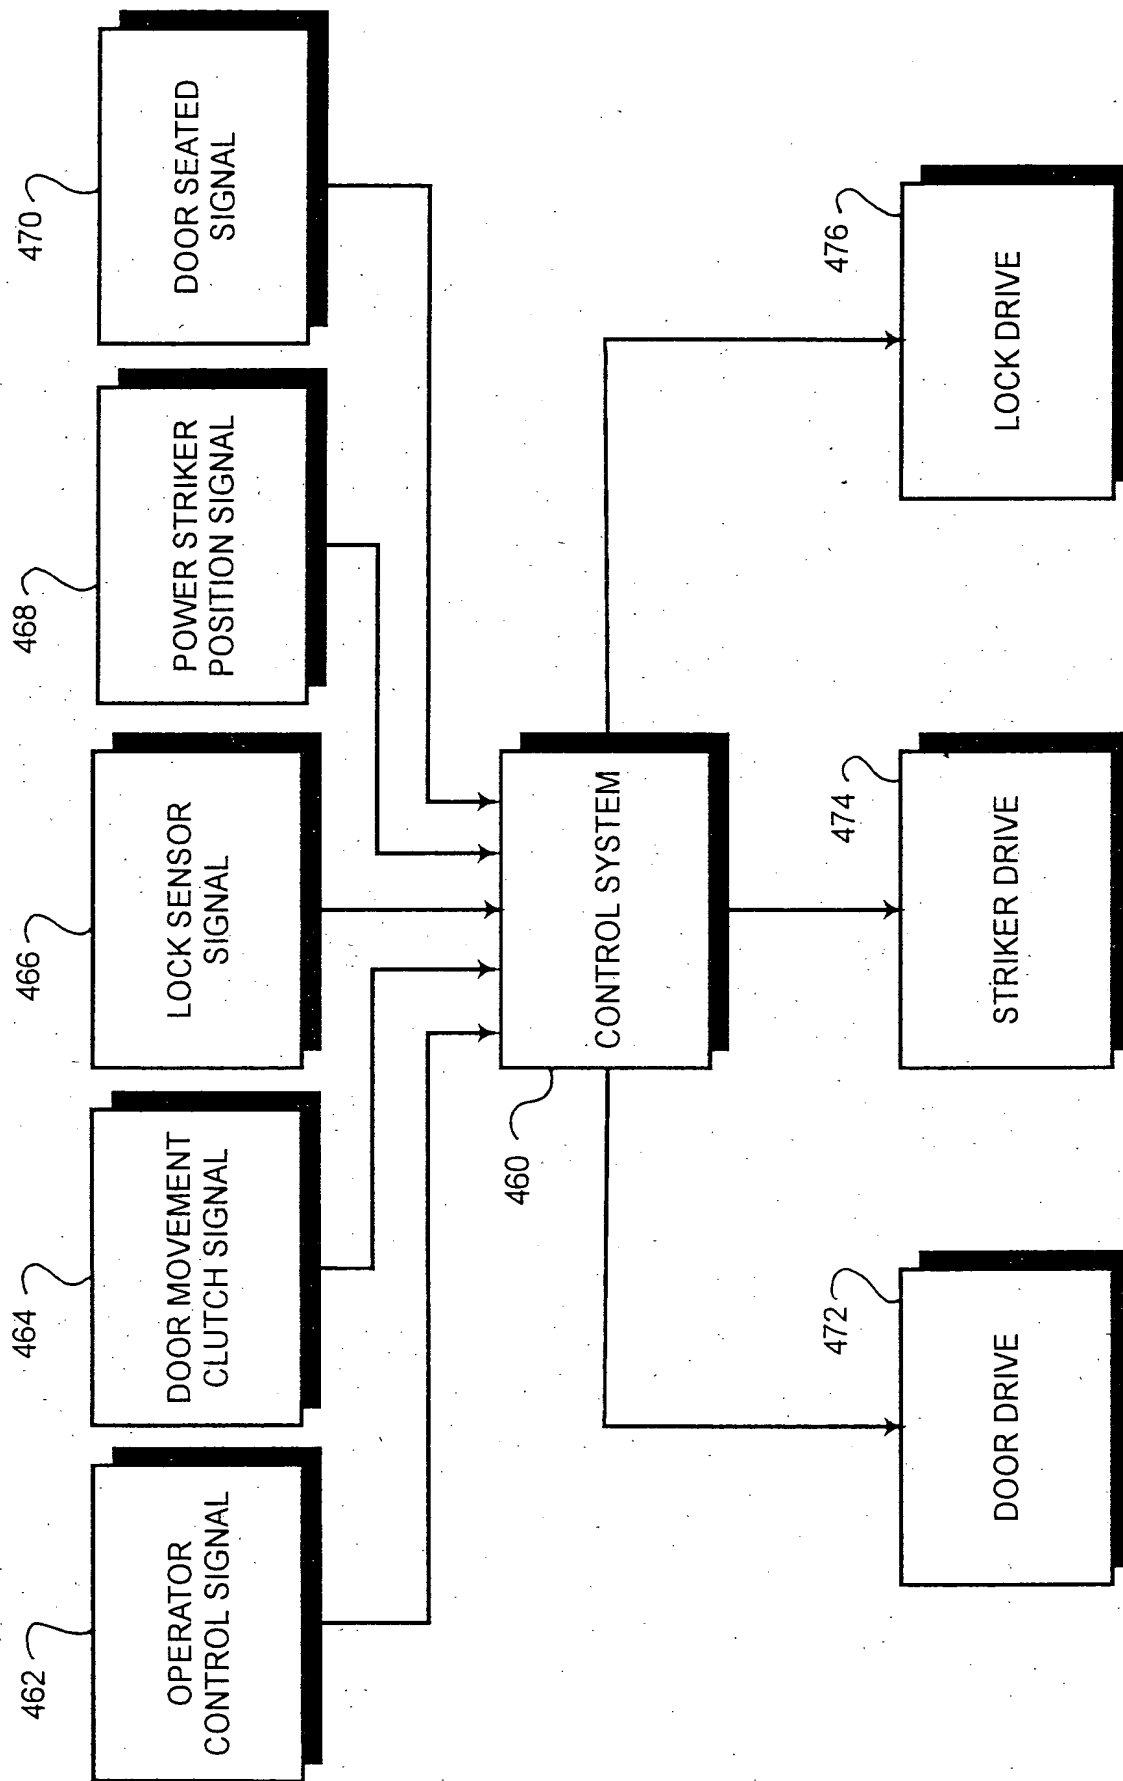


FIG - 22

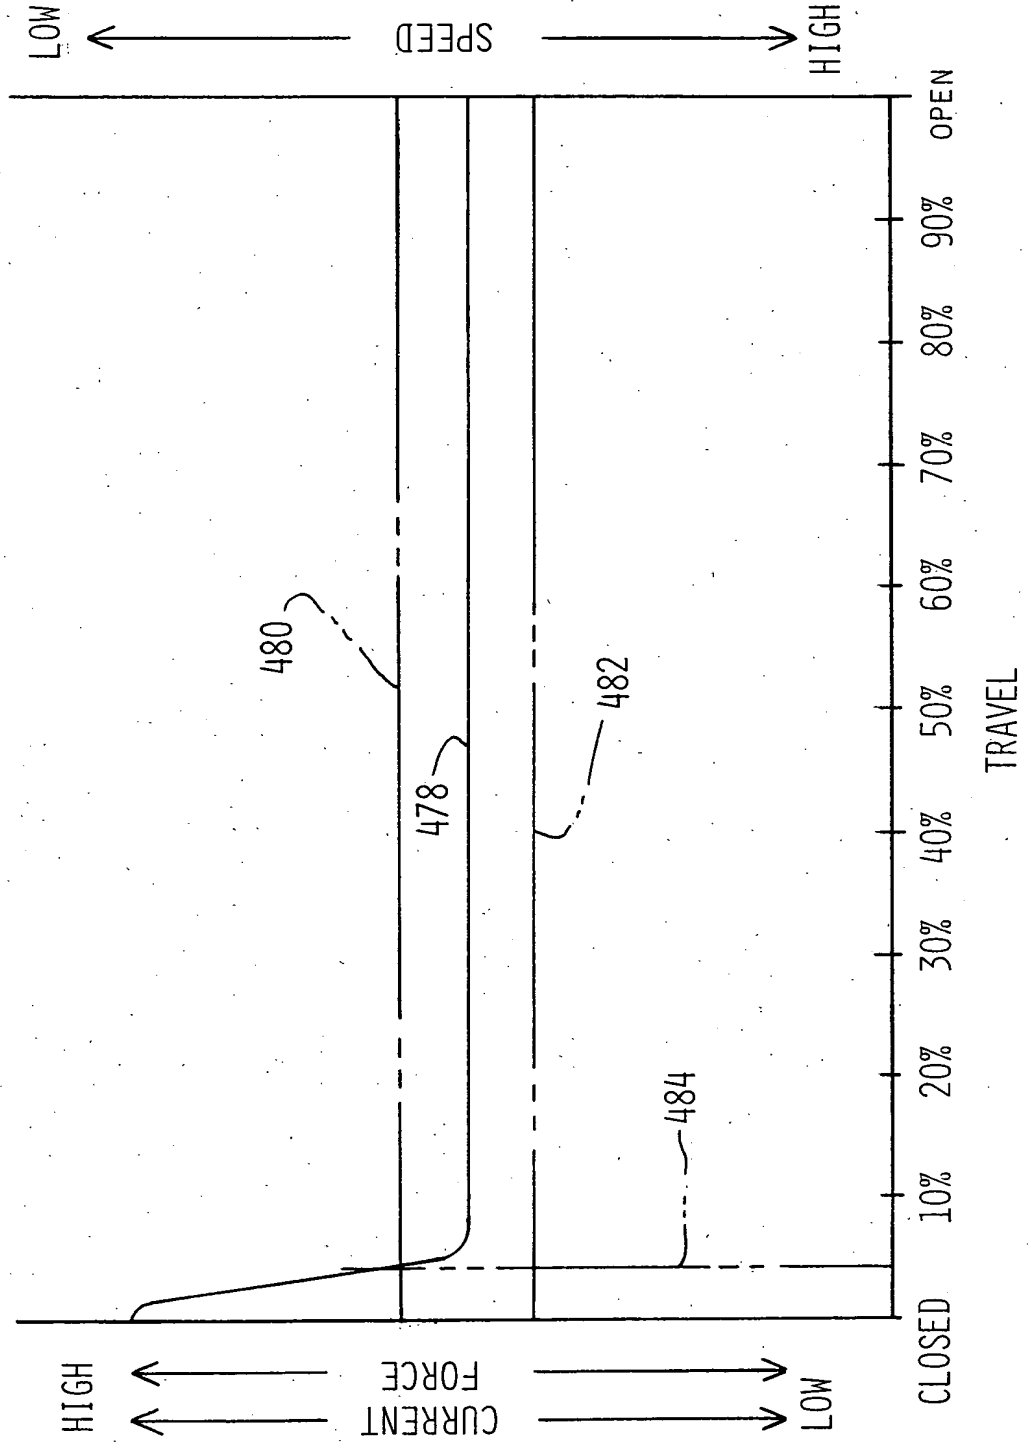


FIG - 23



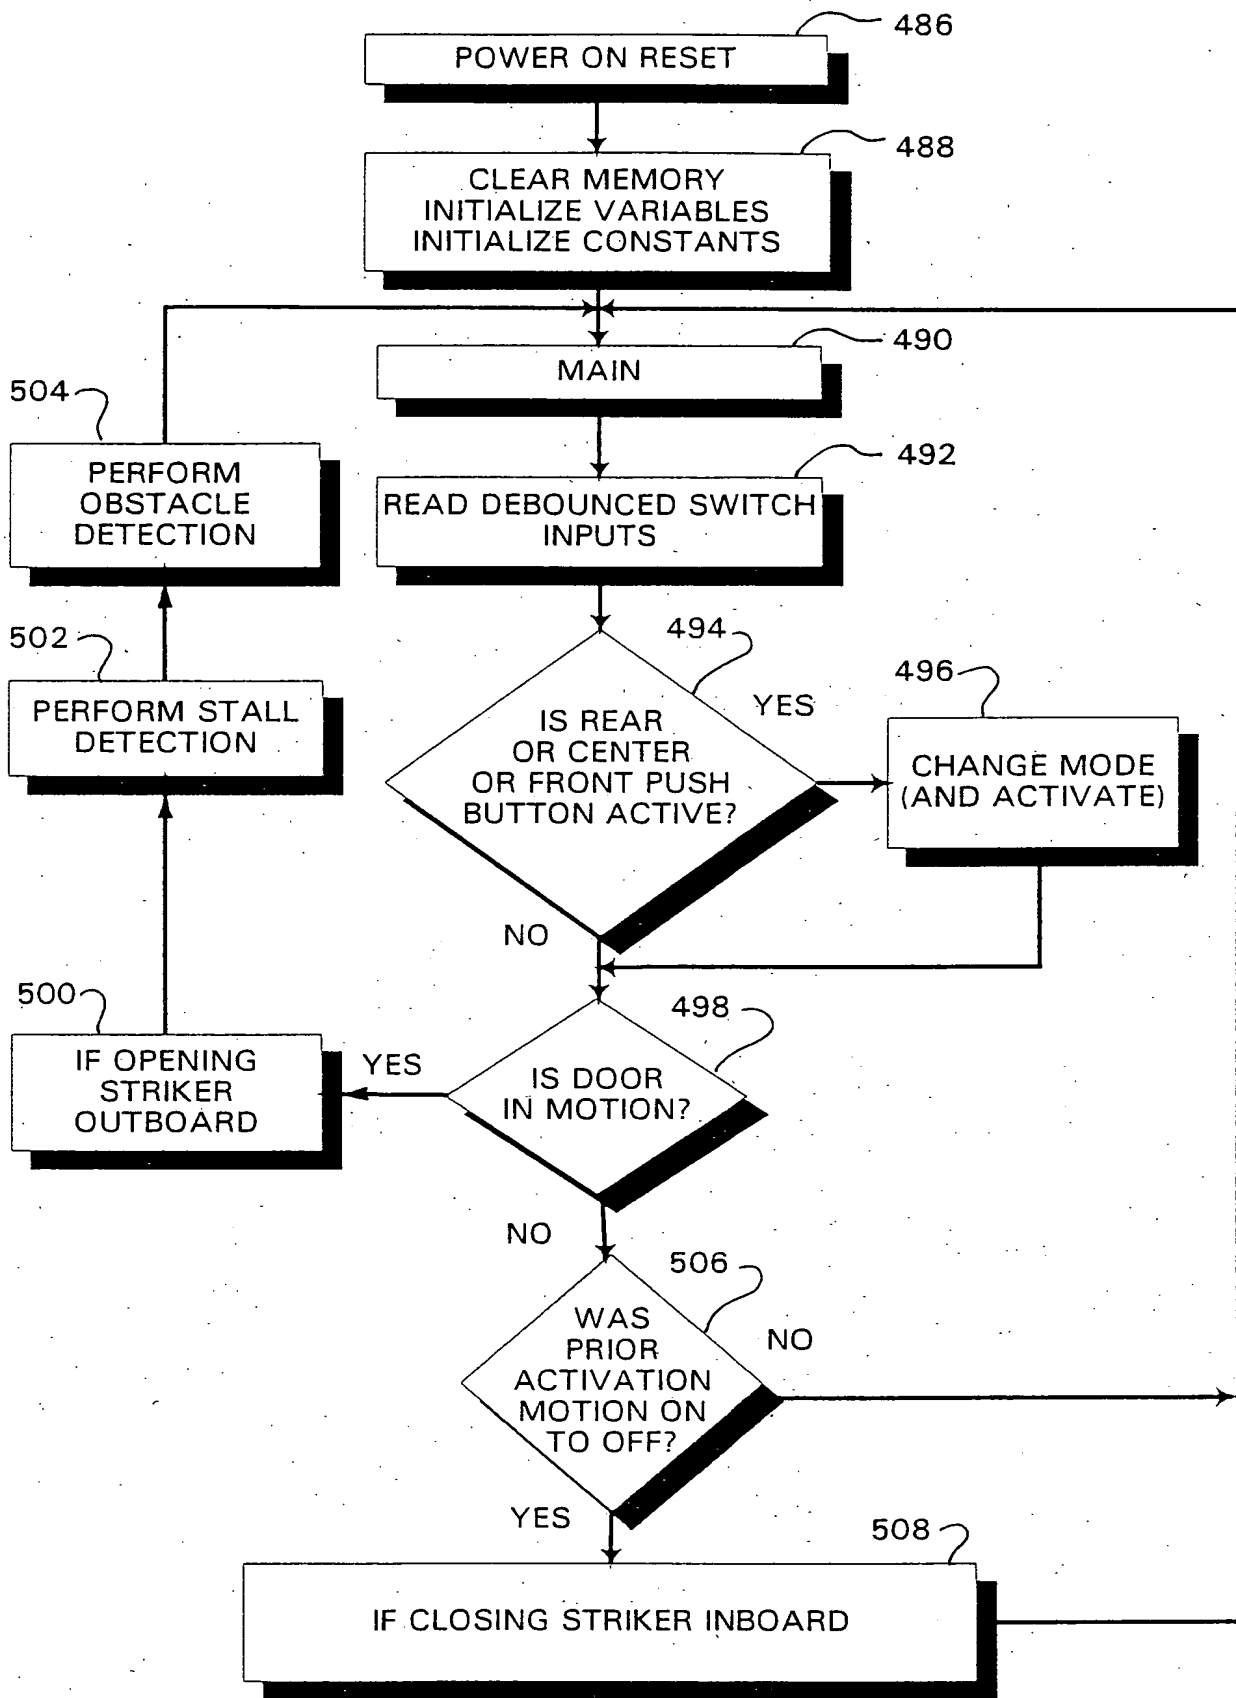


FIG - 24

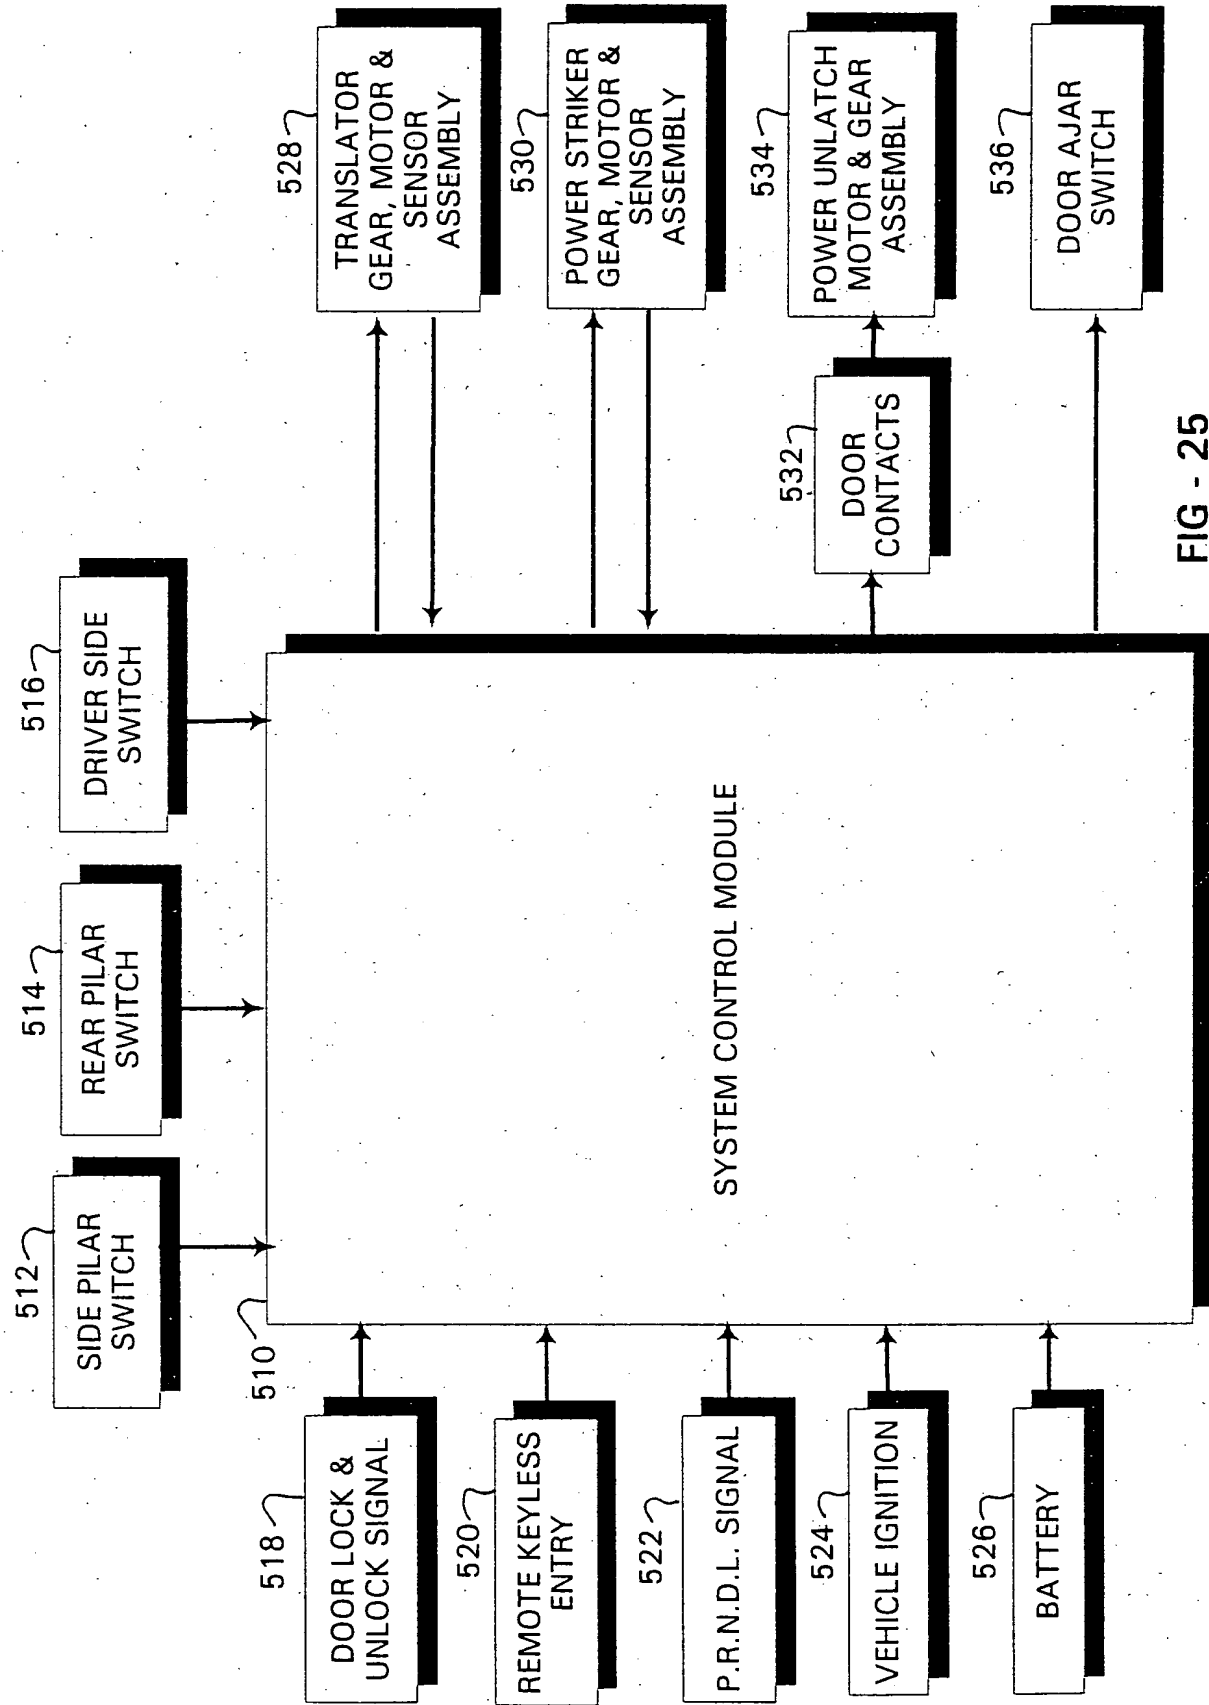


FIG - 25